



ProSecure TBT window locking system Concealed and visible hinges High security as standard





ProSecure TBT Window Locking System with concealed and visible hinges

The ProSecure TBT window locking system is a Police Preferred Specification product. It is available in two versions with visible or concealed hinges. The concealed version is profile related.

The systems jigless design is simple to install, with 100° sash opening for ease of fabrication. There are a wealth of features including an anti-blow back detail and it carries 130kg sash weight as standard.

The ProSecure TBT range has been independently tested to the latest European and British Standards both at IFT Rosenheim in Germany and at the Mila Test Centre to all of the required operational reliability, security and corrosion resistance standards.

The range has been security tested to PAS24: 2016, is Secured by Design and is backed with a market-leading 10 year guarantee.

Quality, not compromise.



Concealed hinges for improved sight-lines




Suited window furniture available



Easy to assemble corner hinges and adjustment point



High security locking as standard

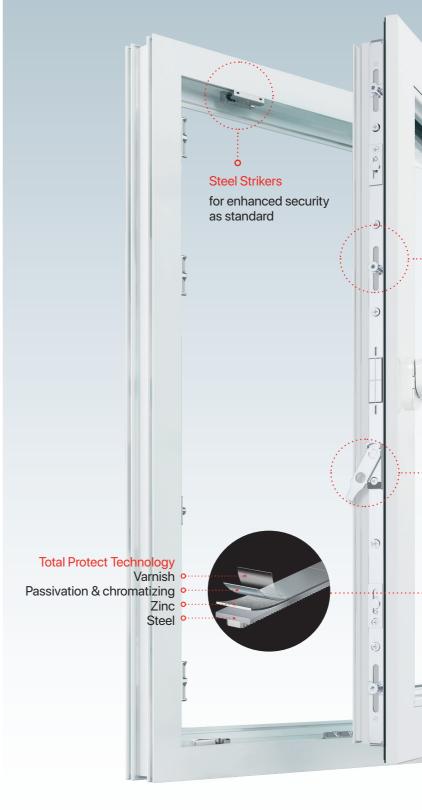



Security as Standard

Intelligent Design

The stay arm has 2 smart design features - a mishandling device to prevent handle operation when in the tilt position and an anti blowback latch

Security Locking Points

Steel mushroom cam multipoint locking for enhanced security as standard

Mishandling Device & Sash Lifter

Prevents handle operation when in the tilt or turn position and acts as a sash lifter to ensure precise engagement of the sash when closing

Total Protect Technology

A patented coating ensures the highest corrosion resistance to BS EN 1670 grade 5, 480 hours salt spray resistance

Heavy Duty Hinges

130kg sash weight capacity as standard

Colour-matched Covers

4 UV stable colours available including black, cream, white and brown for visible hinge version


Certified at Europe's largest, leading test house as well as in the UK to British Standards





0

ProSecure TBT window Locking System with visible hinges

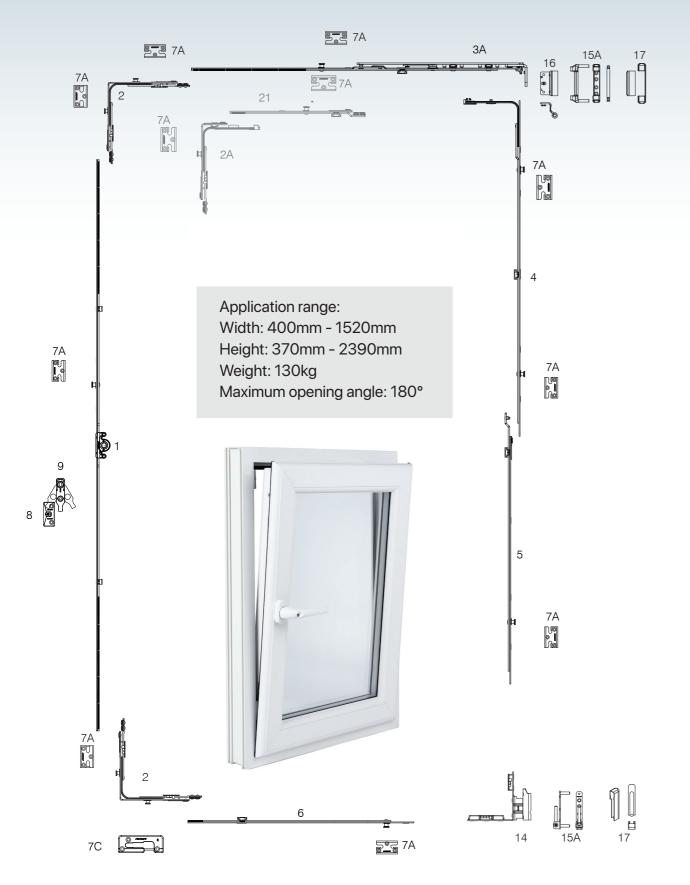


	No.	Description	
	Gear variable 0, L=250, 450-550		
	1	Gear variable 1, L=450, 551-750	
	1	Gear variable 2, L=930, 751-1230, 1 ML, security	
	1	Gear variable 3, L=1130, 950-1430, 1 ML, security	
	1	Gear variable 4, L=1410, 1231-1710, 2 ML, security	
	1	Gear variable 5, L=1610, 1431-1910, 2 ML, security	
	1	Gear variable 6,L=2090, 1911-2390, 3 ML, security	
	2	Corner transmission 150x150, 2 ML, security	
	2A	Narrow corner transmission 50x150, security	
	ЗA	Stay arm 1, tilt first, L=450, 400-600	
	ЗA	Stay arm 2, tilt first, L=650, 601-800	
	ЗA	Stay arm 3, tilt first, L=890, 801-1040, security	
	ЗA	Stay arm 4, tilt first, L=1130, 1041-1280, security	
	4	Middle lock L=400, 2 ML, security	
	4	Middle lock L=650, 2 ML, security	
	4	Middle lock L=820, 2 ML, security	
	4	Middle lock L=1130, 3 ML, security	
	5	Middle lock extension 480 mm, security	
	5	Middle lock extension 680 mm, security	
	6	Extension lock for corner transmission L=480 mm, security	
	7A	Locking plate security	
	7C	Locking plate, tilt first, left / right	
	8	Lifting plate	
	9	Mis-handling device with sash lifter	
	14	Rebate corner hinge	
	15A	Frame hinges, 130 kg in one set	
	16	Top sash hinge	
	17	Hinges covers set	
	21	Extension lock 240 mm, security	
		* = Colour Related	
		** = 9mm or 13mm Hinge	
		*** = Profile Related	



Application range by width	Application range by height	Part No.
-	450-550	K1131-02-N03
-	551-750	K1131-04-N03
-	751-1230	K1131-09-N03
-	950-1430	K1131-11-N03
-	1231-1710	K1131-14-N03
-	1431-1910	K1131-16-N03
-	1911-2390	K1131-21-N03
400-1280	450-2390	K2012-00-N03
300-400	450-2390	K2006-00-N03
400-600	-	K3014-05-N03
601-800	-	K3014-07-N03
801-1040	-	K3024-09-N03
1041-1280	-	K3024-11-N03
600-1000	600-1000	K4024-04-N03
850-1250	850-1250	K4024-06-N03
1251-1430	1251-1430	K4024-08-N03
-	1251-1730	K4024-11-N03
-	1710-2210	K4025-05-N03
-	2211-2390	K4025-07-N03
-	-	K4030-00-N03
-	-	***
-	-	***
-	751-2390	***
-	751-2390	A7001-00-N03
-	370-2390	A5009-**-R/L03
-	370-2390	A5020-99-N03
-	370-2390	K5001-**-N03
-	370-2390	A7098-99-N0*
-	-	K4023-02-N03



ProSecure TBT window Locking System with concealed hinges

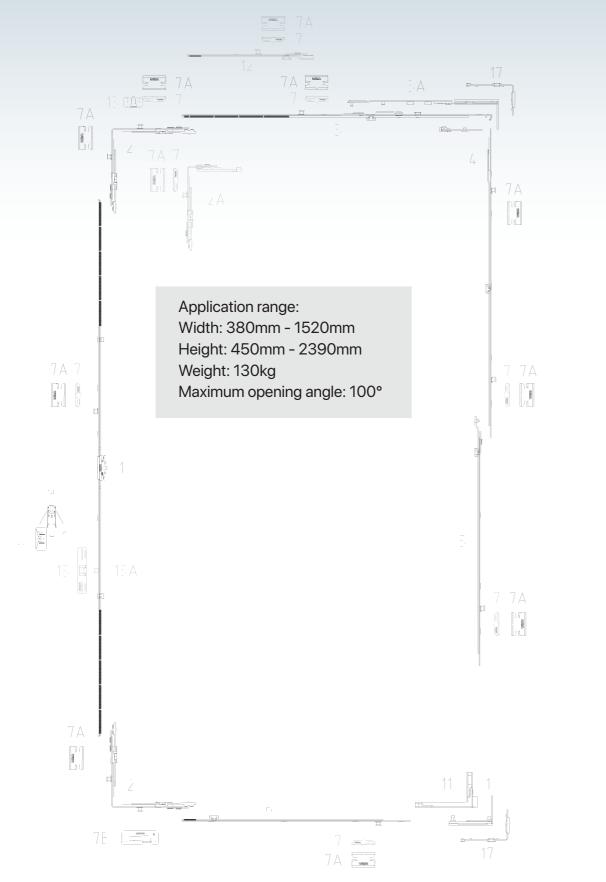



	No.	Description
	1	Gear variable 0, L=250, 450-550
	1	Gear variable 1, L=450, 551-750
	1	Gear variable 2, L=930, 751-1230, 1 ML, security
	1	Gear variable 3, L=1130, 950-1430, 1 ML, security
	1	Gear variable 4, L=1410, 1231-1710, 2 ML, security
	1	Gear variable 5, L=1610, 1431-1910, 2 ML, security
	1	Gear variable 6,L=2090, 1911-2390, 3 ML, security
	2	Corner transmission 150x150, 2 ML, security
	2A	Narrow corner transmission 50x150, security
	3	K3 Concealed Stay Arm Connecting Plate L=565
	3	K3 Concealed Stay Arm Connecting Plate L=685
	3	K3 Concealed Stay Arm Connecting Plate L=925
	3	K3 Concealed Stay Arm Connecting Plate L=1165
	ЗA	Concealed Tilt First Stay Arm, PVC 13mm
	ЗA	Concealed Tilt First Stay Arm, PVC 13mm
	ЗA	Concealed Tilt First Stay Arm, PVC 13mm
	4	Middle lock L=400, 2 ML, security
	4	Middle lock L=650, 2 ML, security
	4	Middle lock L=820, 2 ML, security
ĺ	4	Middle lock L=1130, 3 ML, security
	5	Middle lock extension 480 mm, security
	5	Middle lock extension 680 mm, security
	6	Extension lock for corner transmission L=480 mm, security, cro
	6	Extension lock for corner transmission L=720 mm, security, cro
	7A	Locking plate security
	7B	Locking plate, tilt first, left / right
	8	Lifting plate
	9	Mis-handling device with sash lifter
	10	Concealed Bottom Hinge, PVC 13mm
	11	Concealed Bottom Sash Hinge 13mm
	17	Concealed Hinge Packer
	12	Extension lock 240 mm, security
	12	Extension lock 240mm, no cam
		* = Colour Related
		** = 9mm or 13mm Hinge
		*** = Profile Related

	Application range by width	Application range by height	Part No.
	-	450-550	K1131-02-N03
	-	551-750	K1131-04-N03
	-	751-1230	K1131-09-N03
	-	950-1430	K1131-11-N03
	-	1231-1710	K1131-14-N03
	-	1431-1910	K1131-16-N03
	-	1911-2390	K1131-21-N03
	400-1280	450-2390	K2012-00-N03
	380-480	450-2390	K2006-00-N03
	380-680	-	K3030-06-R/L03
	681-800	-	K3030-07-R/L03
	801-1040	-	K3030-09-R/L03
	1041-1280	-	K3030-12-R/L03
	380-800	-	A3005-02-R/L03
	801-1040	-	A3005-03-R/L03
	1041-1280	-	A3005-04-R/L03
	-	600-1000	K4024-04-N03
	-	850-1250	K4024-06-N03
	-	1251-1430	K4024-08-N03
	-	1251-1730	K4024-11-N03
	-	1710-2210	K4025-05-N03
	-	2211-2390	K4025-07-N03
able	401-800	-	K4036-05-N03
ble	801-1280	-	K4036-07-N03
	-	-	***
	-	-	***
	-	751-2390	***
	-	751-2390	A7001-00-N03
	-	-	A5025-13-R/L03
	-	-	A5027-13-R/L03
	-	-	***
	-	-	K4023-02-N03
	-	-	K4038-02-N03





Working with Experts

Mila has partnered with award-winning European hardware manufacturer AXOR to develop the ProSecure TBT system which offers enhanced security as standard.

AXOR is an established hardware manufacturer based in Ukraine with a purpose built factory which is ISO9001 quality accredited.

Mila is their exclusive distributor in the UK.

Contact Mila

T. 01327 312 400 | E. sales@mila.co.uk | W. mila.co.uk



